

**Instructions for packing and use  
- the REAL-X  
OP – 103 Container/Harness**

**Technical Description of the REAL-X  
(OP – 103) Container/Harness  
P – 001 - 05**



6th issue

in Jevíčko 05/2006

**List of Changes**

In case of necessity to change or amend this manual, the holder will be notified by means of bulletins. New (corrected) sheets will be enclosed to such bulletins. The holder of the manual is obliged to record all obtained changes into the List of Changes and replace out-of-date sheets with valid sheets. Changed or amended manual parts will be marked with a vertical line on sides, they will be further marked with the number and issue date of the change at the bottom of the page.

<b>Sequence No. of the Change</b>	<b>Chapter</b>	<b>Sheet nos. with Changes</b>	<b>Date of Issue of New Sheets</b>	<b>No. of the Bulletin with Issued Changes</b>	<b>Date of the Bulletin Approval</b>	<b>Date of execution Signature</b>

## WARNING!

1. 1. Training and experience are required to reduce and eliminate the risk of serious or fatal injuries.  
A – Never use the equipment unless you have read and understood this warning LABEL  
and have also completed a required training course specified for the use of such equipment.

Or

B – Unless you have read and understood all relevant flight manuals and instructions for packing and you have performed at least 100 jumps.

2. In order to eliminate the risk of a serious injury, death, destruction or damage of the canopy, it is strongly recommended not to exceed the following limits:

<b>MAXIMUM EXIT SPEED</b>	<b>240 km/hour / 130 KNOTS</b>
<b>MAX. LOAD WEIGHT</b> <b>(of the parachutist + gear + equipment)</b>	<b>120 kg / 265 lb</b>
<b>MODEL TYPE</b>	<b>OP-103/PS-055 or OP-103/PS-034 U</b>
<b>PART NO.</b>	
<b>SERIES</b>	
<b>DATE OF PRODUCTION</b>	

This parachute is certified under TSO C 23d.

**MarS Inc.**  
**Okružní II. čp. 239**  
**569 43 Jevíčko**  
**CZECH REPUBLIC**

**CHAPTER I.**

## Technical Description of the Container/Harness

1. Purpose
2. Tactical and technical parameters
3. Functions of the container
4. Parts of the container/harness
5. List of replaceable parts
6. Parts of the container/harness - technical description

**CHAPTER II.**

## Instructions for Packing and Use

1. General instructions
2. Inspection of the container before use
3. Removal of faults/Troubleshooting
4. Guidelines for the replacement (assembly) of parachute parts
5. Packing Tools
6. Packing of the Container
7. Assembly of a Cypres EXPERT device
8. Assembly of an MPAAD device

**CHAPTER III.**

## Storage and Transportation of the Parachute (container)

1. Preparation of the parachute (container) for storage
2. Storage of the parachute (container)
3. Transportation of the parachute

**CHAPTER IV.**

## Removal of Dirt, Washing, Cleaning

## CHAPTER I.

### ***Technical Description of the Real-X (OP-103) Container***

#### **1. Purpose**

- 1.1. The aim of this technical description is to provide basic parameters, parts and guidelines for the use of the container/harness.
- 1.2. The container/harness is designed for sports jumps, mostly RW disciplines and it is used only for free falls.

#### **2.Tactical and Technical Parameters**

##### **2.1. Basic parameters**

SIZE OF THE REAL-X CONTAINER	CONTAINER VOLUME OF THE RESERVE PARACHUTE (cm <sup>3</sup> / cu.in)	CONTAINER VOLUME OF THE MAIN PARACHUTE (cm <sup>3</sup> /cu.in)	MAX. SPEED AT THE CONTAINER OPENING km/hour/knots	MAXIMUM WEIGHT (kg/lbs)	NOTE
<b>02</b>	2679/163	3017/184	240/130	120/265	
<b>03</b>	3389/207	3631/221	240/130	120/265	
<b>04</b>	3556/217	3737/228	240/130	120/265	
<b>05</b>	3809/232	4846/295	240/130	120/265	
<b>06</b>	4304/262	6348/387	240/130	120/265	

##### **2.2. Functional parameters of the container**

The container assures proper functioning on condition that:

- The weight of the parachutist including gear is in accordance with data in the chart no. 2.1
- Flight speed ranges between 90 to 240 km.h<sup>-1</sup>
- The canopy is disconnected from the harness by means of the cutaway release
- Freefalls last 3 seconds in minimum.

### **2.3. Operational Conditions**

- Main and reserve parachutes can be packed for jumps for 12 months in maximum, unless the manufacturer of the main and reserve parachutes do not specify a different period.
- The functioning of the container/harness is assured when stored between - 40 to + 93.7° C at relative air humidity corresponding to such temperatures.
- The gear of the parachutist must be attached to the parachutist 's body in such a manner that assures the proper functioning of the container

### **2.4. Parameters Assuring Reliability**

Warranty period

- a) Lasts 24 months on condition that repairs and replacements of used parts are carried out, storage conditions are maintained and regular inspections connected with the airing of the parachute are performed
- b) Begins with the date of the shipment of the parachute – shipment must take place not later than 6 months since the production date in maximum
- c) During warranty period the manufacturer will not accept claims in the following cases of:
  - Damage of parachute parts caused by their catching on gear
  - Violation of conditions of packing, storage and maintenance of the parachute by the user
  - Missing parachute log book or its improper records
  - Failure to follow the instructions of this technical description
  - Any unskilled handling with the parachute

### **2.5. General Overhaul**

- Parachutes are accepted for general overhaul if a user/a representative of the user evaluates further use of such a parachute as not suitable.
- General overhaul is performed either directly by the manufacturer or by an organization or person authorized by the manufacturer.

### **2.6. Total Service Life**

The total service life of the parachute is set to 15 years in maximum. However, it depends on the technical condition of each container. Therefore it is required to meet the following conditions:

- a) replace damaged parts in time and without any delay. Any replacement of parts must be recorded in the parachute log book.
- b) repair the parachute and its parts in time and without any delay, always according to technical conditions of repairs. Each and every repair must be recorded in the parachute log book.
- c) after the elapse of 5 years carry out overall technical inspections (validity - 2 years inmaximum, result to be recorded in the parachute log book) till its unworthiness for jumps

The evaluation of the technical condition of the parachute (technical inspection) is performed directly by the manufacturer or by an authorized organization or person.

### 3. Functions of the Container

#### Free falls with manual opening

After the exit out of the aircraft and after 3 seconds have passed in minimum, the parachutist throws away the pilot chute. The parachute container opens and the pilot chute withdraws the container with a stowed canopy. Suspension lines are unlaced from rubber loops on the container and the closing flap of the container becomes released. ATTENTION use only loops that encircle the bundle with lines tightly.

After the lines are extended in full length, the container is pulled off the canopy and canopy cells are gradually inflated with air.

The spreading of the canopy is slowed down by the slider, which is anchored on four bundles of suspension lines.

After all cells of the canopy are inflated with air and the slider moves to the risers of the supporting harness, the parachute is opened. The parachutist releases the steering loops and by their pulling (to their chest), steering lines are released from brake rings at risers. After all these operations are completed, the canopy begins gliding in the air. The parachutist controls the parachute with steering lines to a set place for landing.

### 4. Parts of the Container/Harness

4.1	Container (OP – 103)	1 piece
4.2	Harness (PS – 034 U or PS – 055 type)	1 piece
4.3	Release of the reserve parachute (U – 064 or U – 051)	1 piece
4.4	Cutaway release (U – 079)	1 piece
4.5	Reserve pilot chute (PV – 038)	1 piece
4.6	Canopy container of the reserve parachute (VV – 075)	1 piece
4.7	Steering loops of the reserve parachute (ŘP – 006)	1 pair
4.8	Main parachute risers (VK – 33/430/17-R, VK – 33/510/20-R)	1 pair
4.9.	Steering loops of the main parachute (ŘP – 012)	1 pair
	Or	
	Main parachute risers (VK – 33/430/17-Z, VK – 33/510/20-Z)	1 pair
	Main parachute steering loops (ŘP – 008)	1 pair
5.0	Canopy container of the main parachute (VV – 074)	1 piece

Assembly chart of parts of specific container sizes

Type specification of parts (INDEX)	Container Size				
	100/100	120/120	130/130	150/150	175/175
	Size 02	size 03	size 04	size 05	size 06
PV-038	PV-038	PV-038	PV-038	PV-038	PV-038
VV-075 of reserve parachute	VV-075/02	VV-075/03	VV-075/04	VV-075/05	VV-075/06
ŘP-006 of reserve parachute	ŘP-006	ŘP-006	ŘP-006	ŘP-006	ŘP-006
WP reserve parachute	WP 110	WP 130	WP 130 (WP 150)	WP 150	WP 175
Softlines MarS lengths 145 mm – SFL 145 or Softlines SFL BP-01 or Softlines P.D. (PD Slink) or Bolt clips WIRT CZ (4 kN)	Softlines or Bolt clips	Softlines or Bolt clips	Softlines or Bolt clips	Softlines or Bolt clips	Softlines or Bolt clips
OP-103, PS-055	OP-103 PS-055	OP-103 PS-055	OP-103 PS-055	OP-103 PS-055	OP-103 PS-055
OP-103, PS-034 U	nebo PS-034 U	nebo PS-034 U	nebo PS-034 U	nebo PS-034 U	nebo PS-034 U
VV-074 of main parachute	VV-074/02	VV-074/03	VV-074/04	VV-074/05	VV-074/06
PV-042 or PV-043 or PV-052 or PV-053	PV-042 or PV-043 or PV-052 or PV-053	PV-042 or PV-043 or PV-052 or PV-053	PV-042 or PV-043 or PV-052 or PV-053	PV-042 or PV-043 or PV-052 or PV-053	PV-042 or PV-043 or PV-052 or PV-053
VK-33/430/17-R VK-33/510/20-R	VK-33/430/17-R VK-33/510/20-R	VK-33/430/17-R VK-33/510/20-R	VK-33/430/17-R VK-33/510/20-R	VK-33/430/17-R VK-33/510/20-R	VK-33/430/17-R VK-33/510/20-R
ŘP-012 of main parachute	ŘP-012	ŘP-012	ŘP-012	ŘP-012	ŘP-012
Or					
VK-33/430/17-Z VK-33/510/20-Z	VK-33/430/17-Z VK-33/510/20-Z	VK-33/430/17-Z VK-33/510/20-Z	VK-33/430/17-Z VK-33/510/20-Z	VK-33/430/17-Z VK-33/510/20-Z	VK-33/430/17-Z VK-33/510/20-Z
ŘP-008 of main parachute	ŘP-008	ŘP-008	ŘP-008	ŘP-008	ŘP-008
U-079 cutaway release	U-079	U-079	U-079	U-079	U-079
U-064 or U-051 Reserve parachute release	The U-064 or U-051 reserve parachute release is delivered with the PS-034 U harness, only the U-064 release is delivered with the PS-055 harness.				



Chart of main parachute closing line depending on the size of the reserve parachute container (mm)

Length of the reserve parachute closing line		
Size of container	MPAAD	CYPRES
01	--	--
02	75	90
03	80	95
04	85	100
05	90	105
06	95	110

## 5. List of Replaceable Parts

Except for the container/harness, all other parts can be replaced.

## 6. Technical Description of Parts of the Container/Harness

### 6.1. The OP – 103 Container (fig. 1, 2)

The OP/103 container is made of PAD fabric with the minimal strength as follows:  
Texture 1700N, weft 1300N.

The main and reserve parachutes are stowed in the trapezoidal container with rounded edges. The back pad, main parachute container and reserve parachute container are sewn together and form one unit. The container of the main parachute consists of: the back pad on the bottom and the circumferential part of the main parachute container on sides. The bottom flap, left side flap and right side flap of the main parachute container are sewn on the circumferential part. The bottom part of the central flap covers the main parachute container from the top and its top part overlaps the area of the reserve parachute container. The reserve parachute container consists of the main part that leads into the right and left flaps of the reserve parachute. The top closing flap and the covering flap of the reserve parachute are sewn on the neck-hole of the back pad. The covering flap is inserted into the top part of the central flap. Bushings for the closing line of the reserve parachute container are pressed-on to the bottom of the reserve parachute. The closing line of the main parachute container is led through the grommet on the bottom flap of the main parachute container.

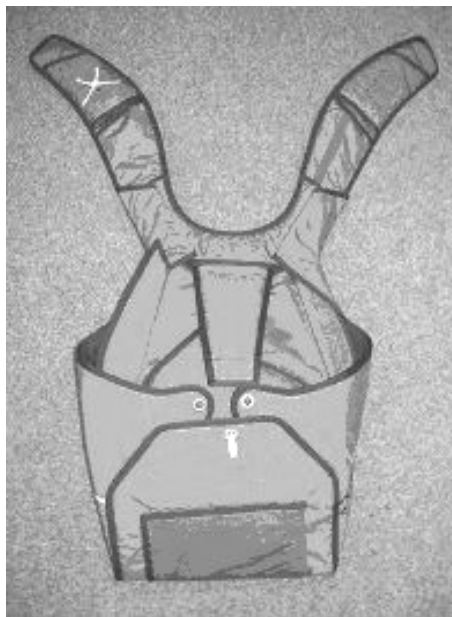


fig. 1

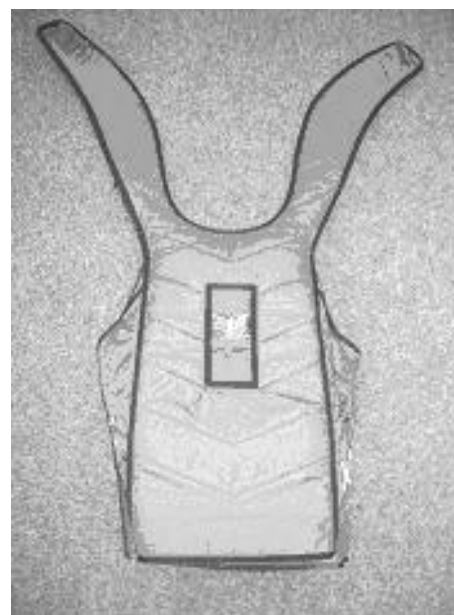


fig. 2

## **6.2. Harness**

The PS-055 or PS – 034 U harnesses are delivered together with the container.

### **The PS-055 Harness**

The supporting harness is made of a PAD strap with the minimal strength of 17,000 N and is designed for the attachment of the parachute container to the body of the parachutist. The supporting harness consists of main straps, leg straps, chest straps, back straps and lumbar strap.

The main strap is doubled and bifurcates into two parts above the cutaway ring, which is 33 mm large. The divided strap forms ends with loops for the attachment of the reserve parachute. Pockets for the release of the reserve and main parachutes are sewn on the main straps. Another cutaway ring is sewn in the bottom part of the main strap. The lumbar strap, a part of the leg strap with a tightening buckle and part of the leg strap for drawing through the buckle lead from the cutaway ring. The main straps placed at the chest straps are divided with cutaway rings with the diameter of 33 mm, to which chest straps are attached.

Reserve parachute brakes are sewn on the back strap.

The back strap leads from the cutaway ring placed after the bifurcated main strap.

Leg pads are sewn on leg straps, inner sides of leg pads are equipped with sewn-on loops for lacing through the rounded rubber designed for the tightening of the container to the parachutist's body. The size of the pressure strength can be regulated by different positions of knots made on the rounded rubber.

### **The PS-034U Harness**

The supporting harness is made of a PAD strap with the minimal strength of 17,000 N and is designed for the attachment of the parachute container to the body of the parachutist. The harness consists of main straps, leg straps, chest straps, back straps and a lumbar strap.

The main strap is doubled and bifurcated into two parts above the cutaway ring, which is 33 mm large. The bifurcated strap forms ends with loops for the attachment of the reserve parachute. Pockets for the release of the reserve parachute and cutaway are sewn on the main straps. Another cutaway ring is sewn in the bottom part of the main strap. The lumbar strap, a part of the leg strap with a tightening buckle and part of the leg strap for drawing through the buckle lead from the cutaway ring. Chest straps are sewn on main straps.


Reserve parachute brakes are sewn on the straps to secure the attachment of the reserve parachute.

The back strap leads from the cutaway ring placed after the bifurcated main strap.


Leg pads are sewn on leg straps.

**6.3. The U-064 Release of the reserve parachute (fig. 3a)**


The release secures the opening of the reserve parachute container. It consists of a handle and a cable with a needle. A Velcro strap is sewn on the release handle, which helps fix the release in the pocket on the harness.

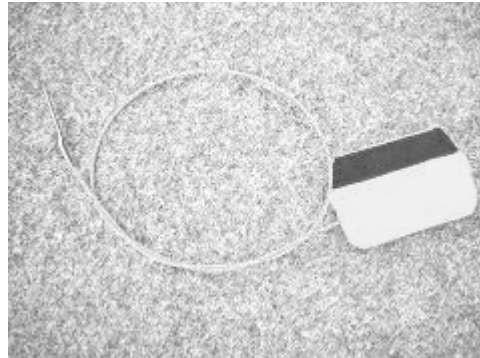**fig. 3a****Or****The U-051 Release of the reserve parachute (fig. 3b)**

The release secures the opening of the reserve parachute container. It consists of a handle and a cable with a needle. The handle is made of a trapezoidal stainless-steel tube.

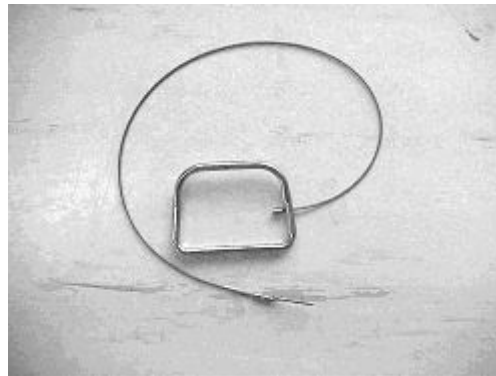**fig. 3b****6.4. The U-079 Cutaway Release (fig. 4)**

The cutaway release secures the disconnecting of the main parachute canopy from the harness. It consists of a handle and a plastic-coated steel cable. A Velcro strap is sewn on the release handle, which helps fix the release in the pocket on the harness.

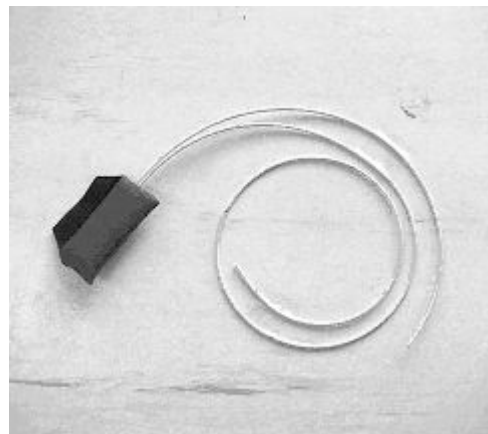**fig. 4**

**6.5. The PV-038 Pilot Chute of the Reserve Parachute (fig. 5)**


The pilot chute secures the opening of the reserve parachute container and pulling the deployment bag (with a stowed reserve parachute canopy) out of the reserve parachute container. It is made of PAD fabric and net. The bottom is reinforced with duralumin sheet. The chute is equipped with a coiled spring with the minimal ejection strength of 180N.

**fig. 5****6.6. The VV-075 Canopy container of the reserve parachute VV – 075 (fig. 6)**

The container is designed for stowing a packed canopy of the reserve parachute into the reserve parachute container. It is made of PAD fabric. A bushing is pressed-on in the middle of the container for leading the closing line of the reserve parachute. A 50mm wide and 3600 mm long webbing is sewn on the bag. A loop for the attachment of the PV-038 pilot chute is sewn on the other end of the webbing.


**fig. 6****6.7. Steering loop of the reserve parachute (ŘP-006) fig. 7a**

The steering loop, made of a 20mm-wide PAD strap, is designed to control the Wing reserve parachute (ŘP – 006 without reinforcement). The steering loop forms an eye with a pressed-on bushing at its end, which secures the connection of the main steering line.

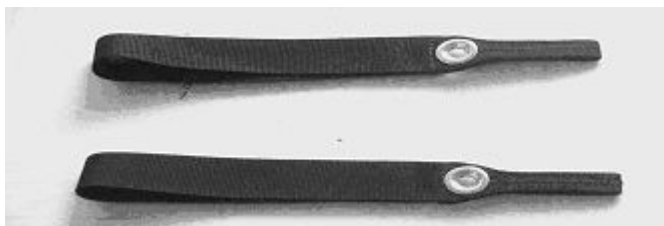**fig. 7a****ŘP - 006**

**6.8. Steering loop of the main parachute (ŘP-012) fig. 7b**

The steering loop, made of a 25mm-wide PAD strap, is designed to control the main parachute. The steering loop forms an eye with a pressed-on bushing at its end, which secures the connection of the main steering line. The ŘP- 012 steering loops are used as a set with the VK-33/430/17-R or with the VK-33/510/20-R risers.

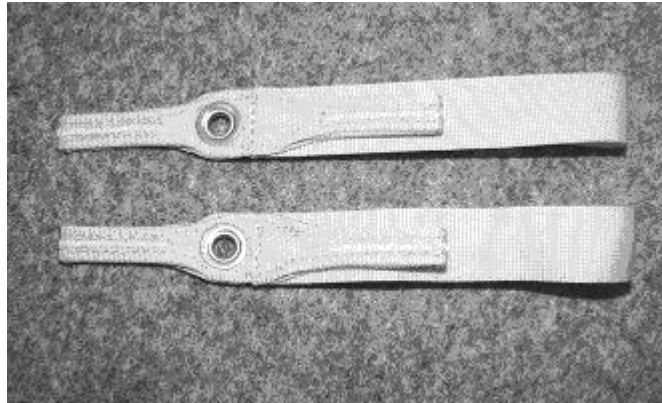**fig. 7b****ŘP - 012****6.9. Risers of the harness****a) VK – 33/430/17-R, VK – 33/510/20-R, fig. 8a**

Risers of the supporting harness of the main parachute are designed for the connection of the main parachute canopy to the PS-034 U or PS-055 harnesses by means of a three-ring system. They are made of a 26mm-wide PAD strap, with the minimal strength of 17,000N. The bottom part of the bifurcation is equipped with a three-ring system securing the connection to the harness. There are loops at the end of the straps, into which suspension lines of the main parachute canopy are connected by means of bolt clips. A 15-mm ring is sewn on the back of the straps securing the leading of the main steering line.

The number under the slash – 430 or 510 shows the strap lengths from the bifurcation.


**Caution!**

The strap near the rings, which are a part of a three-ring system, must remain slightly flexible. Therefore it is required to bend it at least once a month to prevent it from hardening which could result in the worsening of its proper functions during the very disconnection from the three-ring system. This caution applies to all types of risers of the harness.

**fig. 8a****or**

**6.10. Steering loop of the main parachute (ŘP-008) fig. 7c**

The steering loop, made of a 25mm-wide PAD strap, is designed to control the main parachute. The steering loop forms an eye with a pressed-on bushing at its end, which secures the connection of the main steering line. The ŘP- 008 steering loops are used as a set with the VK-33/430/17-Z or with the VK-33/510/20-Z risers.

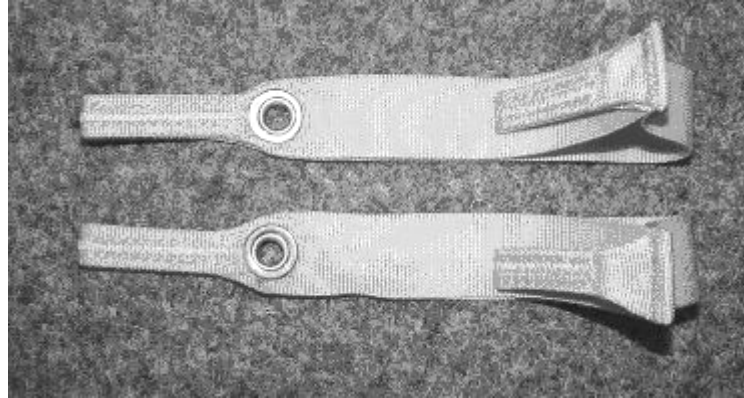**fig. 7c****ŘP - 008****6.11. Risers of the harness****b) VK – 33/430/17-Z, VK – 33/510/20-Z, fig. 8b**

Risers of the supporting harness of the main parachute are designed for the connection of the main parachute canopy to the PS-034 U or PS-055 harnesses by means of a three-ring system. They are made of a 26mm-wide PAD strap, with the minimal strength of 17,000N. The bottom part of the division is equipped with a three-ring system securing the connection to the harness. There are loops at the end of the straps, into which suspension lines of the main parachute canopy are connected by means of bolt clips. A 15-mm ring is sewn on the back of the straps securing the leading of the main steering line.

The number under the slash – 430 or 510 shows the strap lengths from the division.

**Caution:**

The strap near the rings, which are a part of a three-ring system, must remain slightly flexible. Therefore it is required to bend it at least once a month to prevent it from hardening which could result in worsening of its proper functions during the disconnection from the three-ring system. This caution applies to all types of risers of the harness.

**fig. 8b**

## **CHAPTER II.**

### ***Instructions for the packing of the container***

#### **1. General Instructions**

- a) Before packing the parachute, it is necessary to check the entirety and technical condition of the parachute. Damaged parts are either replaced or repaired.
- b) It is not recommended to expose the parachute to direct sunlight during packing.
- c) The parachute is packed by one person. Each packing of the reserve parachute is to be recorded into the log book.
- c) The Real-X container is used as a set with the canopies of the WP series from WP 110 to WP 175, each canopy size of the reserve parachute must correspond to a suitable container size.
- d) No adjustment of the parachute container/harness is acceptable

#### **2. Inspection of the Container before Use**

Parts of the container are checked in the following order:

- The PS – 034 U or PS – 055 harness
- The OP – 103 parachute container
- The U – 079 cutaway release
- The U – 064 or U – 051 release of the reserve parachute

The above mentioned parachute parts are inspected in order to find out any damage and check sewing, fabric, webbings and straps completeness.

An emphasis is put on a careful inspection of metal parts as follows:

- Releases (metal bushings) that must not have any apparent fracture, fraying or any other damage.
- The cutaway release with plastic coating, must not have its surface damaged, cable ends must lead out of cutaway hoses with the same length that must reach 120 mm in minimum.
- Closing lines (of main and reserve parachutes) must not be damaged and must be in perfect entirety.
- The release cable of the reserve parachute container must be of a suitable length (with clearance sufficient for packing amounting to 50mm in minimum).
- The release cable must be straight, without any bends and sharp breaks
- The release needle must not be bent
- Cutaway hoses must not be deformed nor contain any dirt inside.

### **3. Removal of Faults/Troubleshooting**

- a) Removal of faults is carried out by an exchange of damaged parts or a repair according to instructions stated in Technical Conditions of Repairs/Technické podmínky oprav.
- b) Parts that are permitted to be exchanged during the operation:
  - U – 064 or U – 051 release of the reserve parachute
  - U – 079 cutaway release
  - Exchange of risers of the main parachute harness
  - Closing line of the main and reserve parachute
  - Steering loops of the reserve parachute
  - Deployment bag of the reserve parachute
  - Deployment bag of the main parachute
  - PV-038 pilot chute
  - PV-042 or PV-043 or PV-052 or PV-053 pilot chute


Spare parts:

- Packing line of the main parachute
- Packing line of the reserve parachute



#### **4. Guidelines for the replacement (assembly) of parachute parts**

- a) Replacement of the packing line of the reserve parachute for Cypres (fig. 9a)

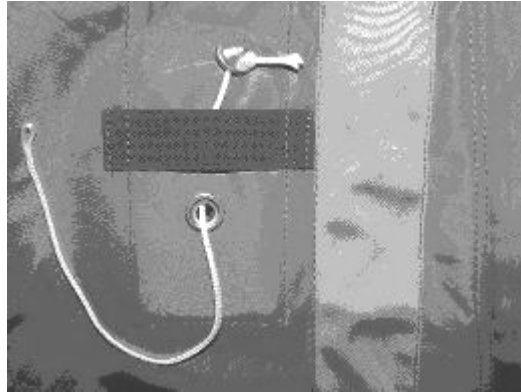

**fig. 9a**

- b) Replacement of the packing line of the reserve parachute for an MPAAD (fig. 9b)




**fig. 9b**

- c) Replacement of the packing line of the main parachute container (fig. 10a, 10b)



**fig. 10a**

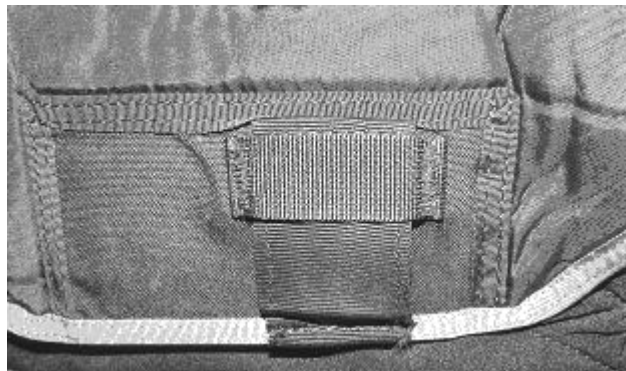

**fig. 10b**

- d) Attachment of the PV - 038 pilot chute to the deployment bag webbing (fig. 11)



**fig. 11**

- e) Connection of the ŘP – 006 steering loop to the main steering line (fig. 12a, 12b)



**fig. 12 a**



**fig. 12b**

f) Braking of the reserve parachute (fig. 13 a,b)



**fig. 13 a**



**fig. 13 b**

- g) Connection of the riser of the harness of the main parachute to the harness (fig. 14 a, b, c,d)



**fig. 14 a**



**fig. 14 b**



**Connected harness riser seen from the bottom**

**fig. 14c**



**Connected riser seen from the top**

**fig. 14d**



## 5. Packing Tools

We use the following tools for packing reserve parachutes:

- a) Accessory needle with a webbing
- b) Line for the limitation of the container extension
- c) Packing line

## 6. Packing of the Container

6.1. The packing of the reserve parachute is carried out according to instructions for the packing of the reserve parachute canopy. Step: packing of the canopy of the reserve parachute into the container. Then follow the steps as shown in fig. 15 – 21. The flap is closed according to the numbering, i.e. no.1 – 6.



**fig. 15**



**fig. 16**



**fig. 17**



**fig. 18**





**fig. 19**



**fig. 20**



**fig. 21a**

### Inserting risers

Risers are inserted between the snap and the cover of risers (fig. 21b, 21c)



**fig. 21b**



**fig. 21c**

### Storage of risers in the container

Risers are stored together-beside each other (fig.. 21d)



**fig. 21d**

6.2. Packing of the main parachute is carried out according to technical description of the main parachute packing. The container flaps are closed in the following order: bottom, top, right, left (see fig. 22-32). The remaining length of suspension lines of the main parachute that could not be put into rubber loops of the deployment bag are placed to the container bottom of the main parachute.



**fig. 22**



**fig. 23**



**fig. 24**



**fig. 25**




**fig. 26**



**fig. 27**




**fig. 28**

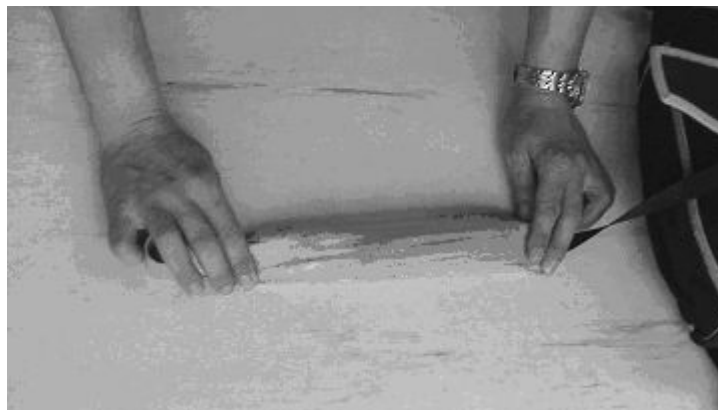

**fig. 29**

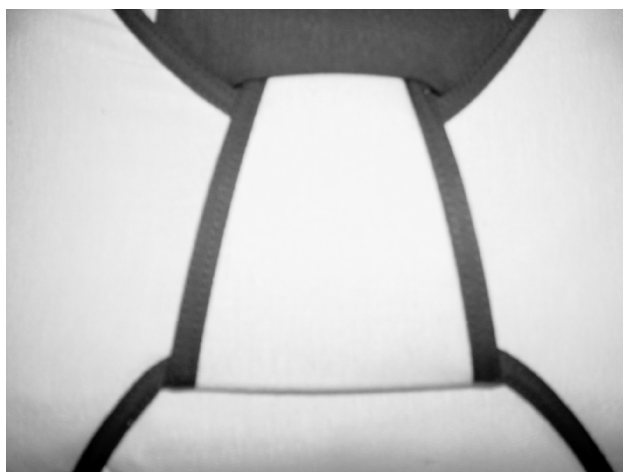

**fig. 30****fig. 31****fig. 32****Special warning:**

The container with the canopy is stored in such a way that the lines remain in the direction from the reserve parachute, i.e. towards the bottom part of the container, top, right, left.







**fig. 34**



**fig. 35**

## **8. Assembly of an MPAAD device**

**The assembly is carried out according to Instructions for use no. P-008-03  
- the Users' Manual of MPAAD Automatic Safety Device**

## **CHAPTER III.**

### **Storage and Transportation of the Parachute (Container)**

#### **1. Preparation of the parachute (container) for storage**

Before the parachute (container) is stored, its inspection must be carried out, if necessary its repair, replacement of damaged parts and airing. The parachute (container) is stored inside a portable bag either packed (for 12 months in maximum) or unpacked. The parachute log-book is put into the portable bag pocket.

#### **2. Storage of the parachute (container)**

The parachute (container) is stored in shelves in a dry, dark and well-aired room. The distance between the bottom shelf and the floor must be 150 mm in minimum, the distance between the shelf and walls must be 500 mm in minimum. If a parachute (container) is stored for a longer period, it must be aired for 24 hours in minimum every 6 months. The parachute (container) is aired in the shade and cannot be exposed to sunlight.

Performed airing is recorded in the parachute log- book.

It is forbidden to store any metal objects that do not belong to parachutes, any oils, acids, solvents or any other aggressive substances in premises where parachutes (containers) are stored.

The following climatic conditions must be fulfilled in storage premises:

Daily temperature .....between +14 and +24 oC

Daily relative humidity ..... between 35 and 73 %

Average relative humidity ... between 45 and 55 %

#### **3. Transportation of the parachute**

3.1. On operational conditions, parachutes (containers) are transported in portable bags.

3.2. During the transportation it is required to prevent:

- a) Moistening of the container
- b) Contamination of the container with oils and chemicals
- c) Mechanical damage

## CHAPTER IV.

### Dirt Removal, Washing, Cleaning

1. Dirt (sand, soil, mud, etc.) on the parachute container and supporting harness contaminated during the use can be cleaned mechanically (e.g. by brushing, shaking or rubbing off).
2. Dirt that cannot be removed mechanically, can be removed with a damp piece of cloth moistened in lukewarm water with soap or cleaning detergents. After such cleaning the container with the harness are to be dried on a place designated for such purposes.
3. The manufacturer warns the user that using a larger amount of water with detergents may cause the occurrence of stains of various colours or soaking of colours from the inside layer of material into the outside layer of material, in particular with containers of light colours. The warranty does not apply to such cases.
4. Washing of containers/harnesses manually or in any washing machines **is forbidden**.
5. Cleaning of containers/harnesses using chemical agents containing chlorine or organic solvents **is forbidden**.